

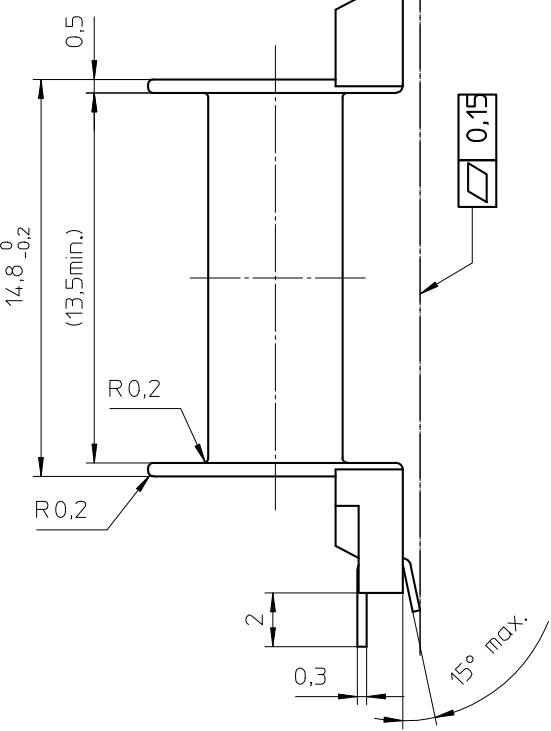


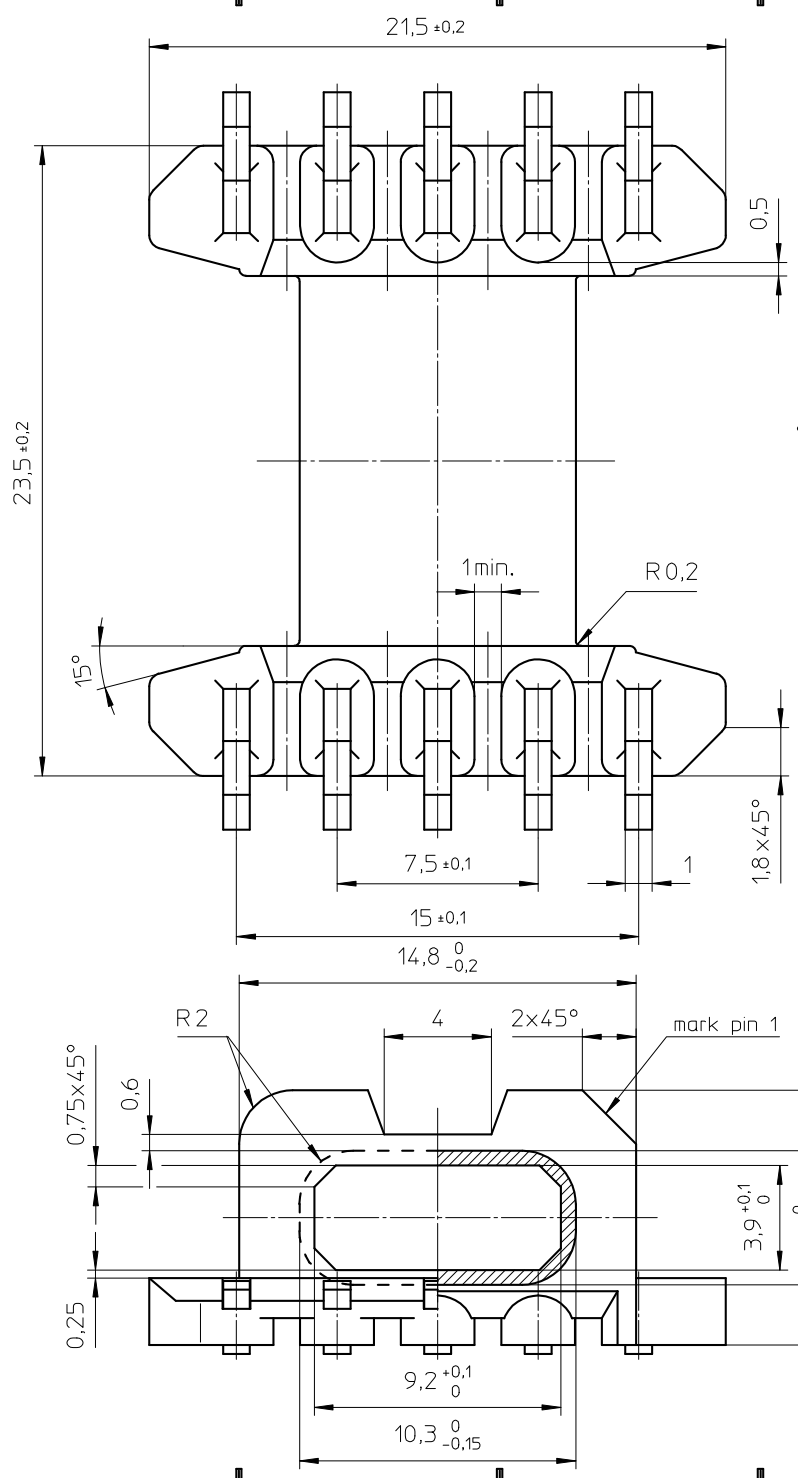

PROPOSED PAD ARRANGEMENT :

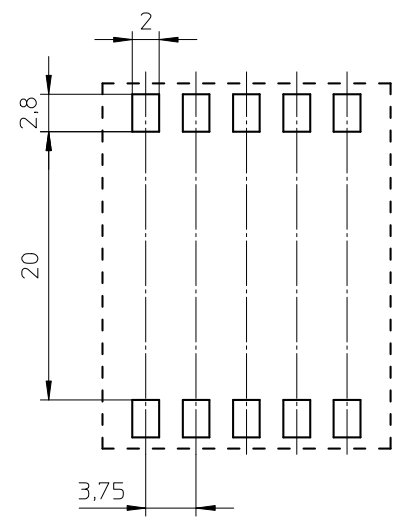

Coil former material: Vectra C130 (LCP), glass-reinforced.
 UL file number: E83005(M) - UL94V-0.
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s
 Min. winding area: 27.7 mm².
 Mean length of turn: 34.1 mm.

CLASSNO.	CPHS-EFD20/7-1S-10P		4322 021 00071		06-06-28
96-05-20					2011-05-25
NAME	M.Marszalek		001		2013-04-25
VER.			112 - 001		
CHECK	CONTR.		069		A3
DAT.	92-03-27		© FERROXCUBE 2000		