

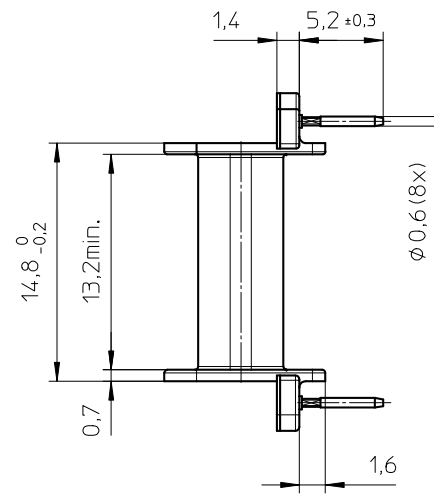
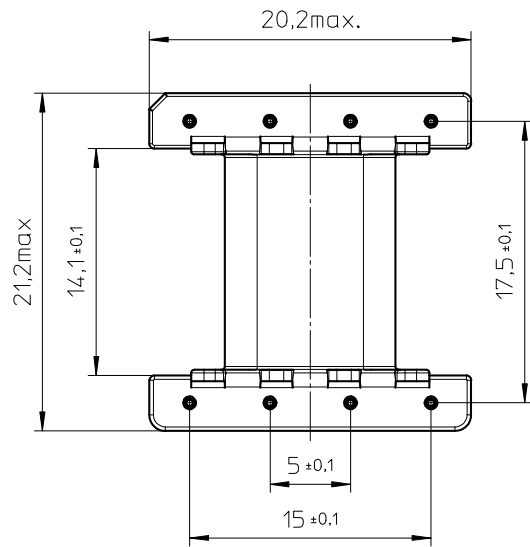


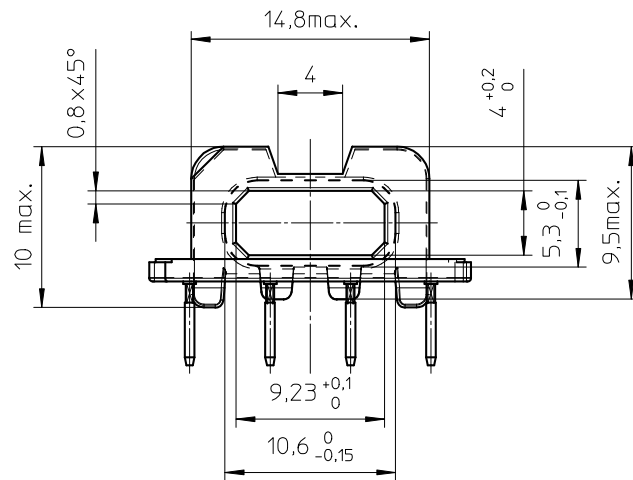

HOLE PATTERN:

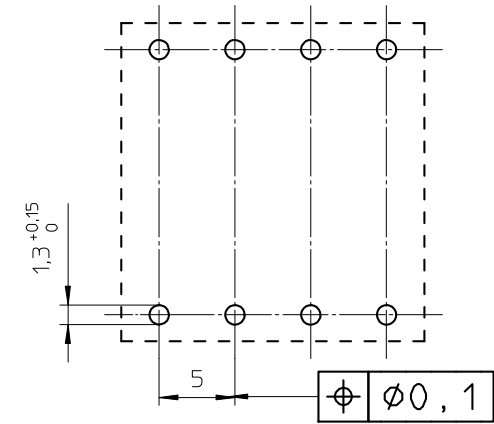

Coil former material:

Sumikon PM9630 (PF), glass-reinforced.

Pin material:

CuSn - Ni flash, Sn plated.

Max. operating temp.:

acc. to IEC 60 085 class H, 180°C.

Resistance to soldering heat:

acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.

Solderability:


acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.

Min. winding area:

26,4 mm².

Mean length of turn:

36,5 mm.



CLASSNO.		CSH-EFD20-1S-8P-IZ				4322 021 06931				07-11-05							
										10-03-31							
07-11-05																	
NAME NAAM		M.Tryngiel				SUPERS. VERV.		001		SPRSH BL BL		110 - 001		069		A3	
MPA		CHECK CONTR.		DAT.		07-11-05		Property of Eigendom van		© FERROXCUBE 2007							