

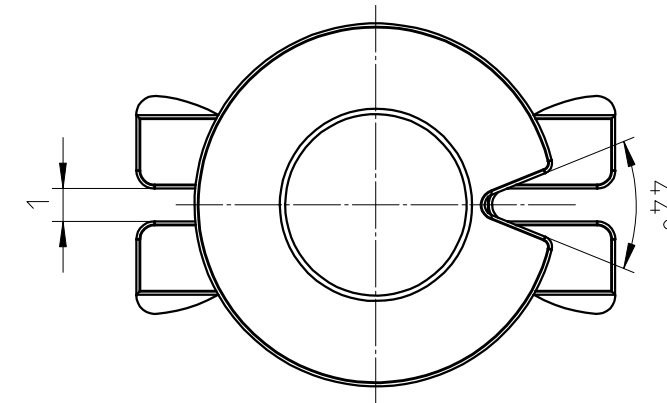
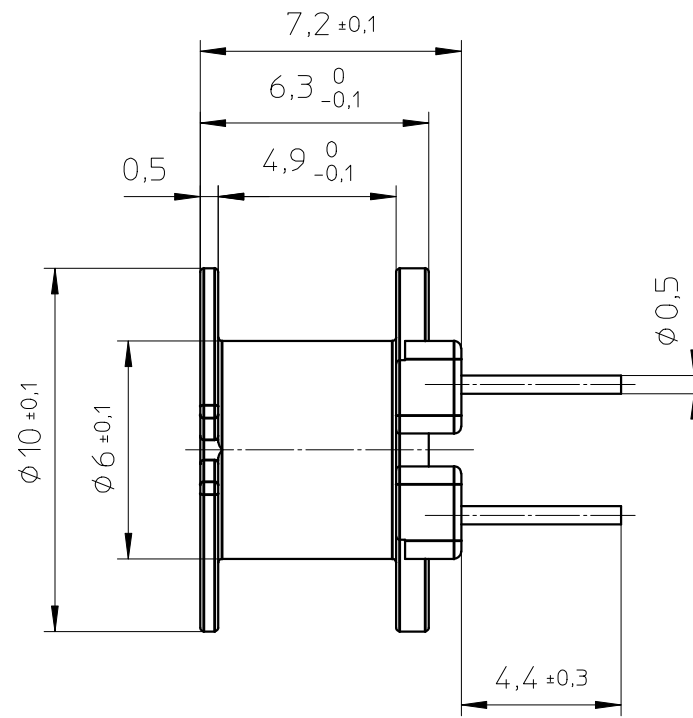
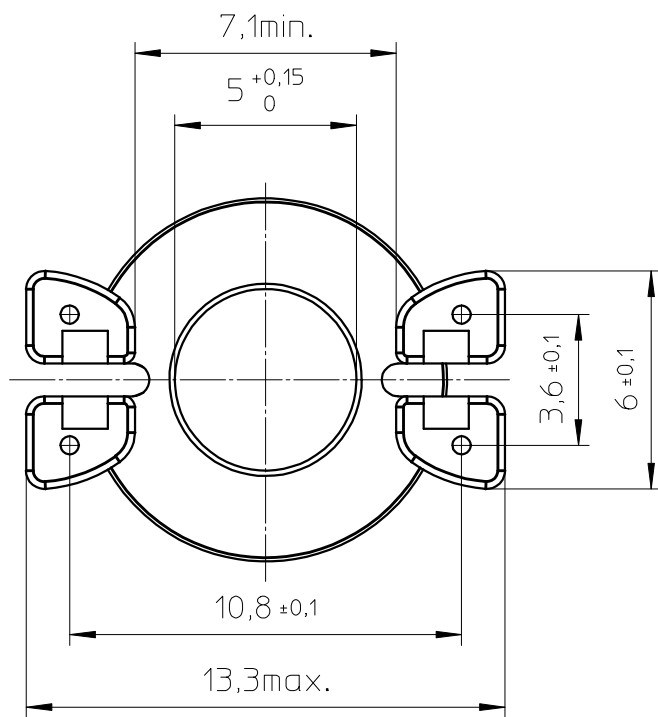




**FERROXCUBE**



Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
 UL file number: E41429(M) - UL94V-0.

Pin material: Copper-clad steel, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.

Min. winding area: 9,1 mm<sup>2</sup>.

Mean length of turn: 25 mm.

CLASS.NO.	2001-07-17		2004-11-15	
	CSV-RM5-1S-4P-T		4322 021 03801	
NAME NAAM	M.Veekens	SUPERS. VERV.	001 <sup>SH</sup> 112 - 001	A3
MPA	CHECK CONTR.	DAT.	2001-07-17	Property of Eigendom van © FERROXCUBE 2000