

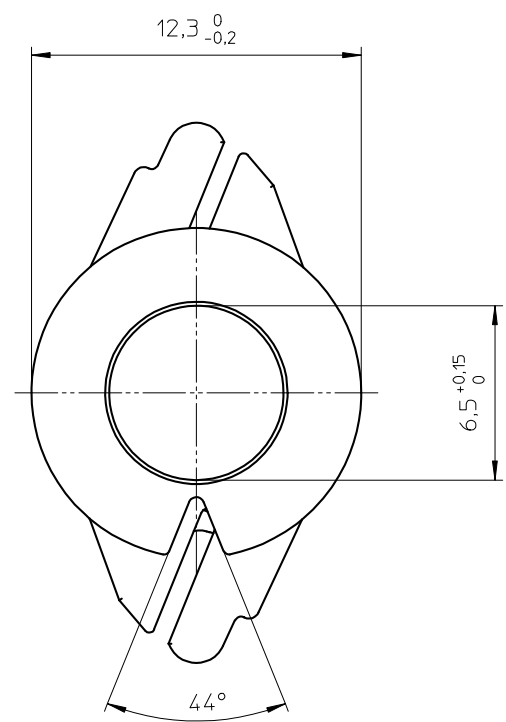
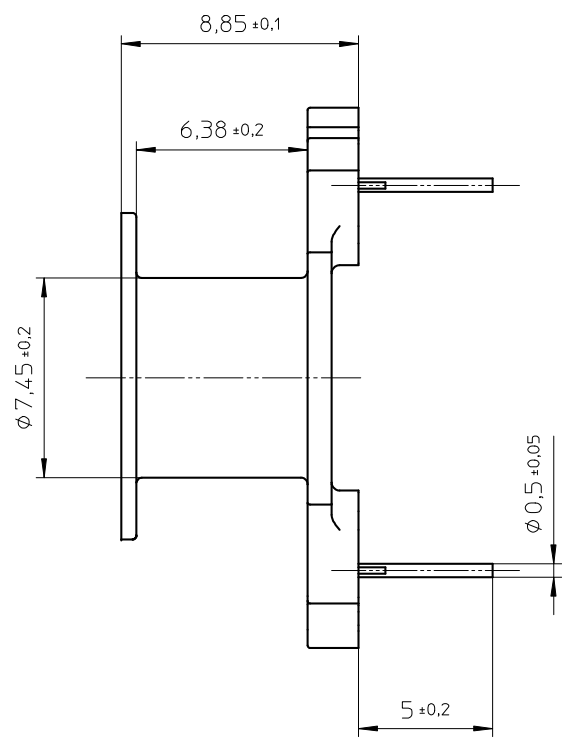


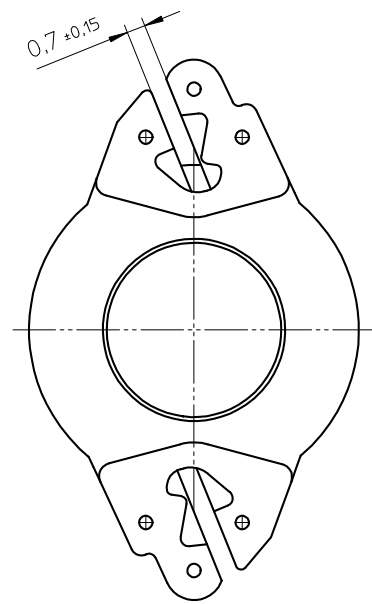

HOLE PATTERN:

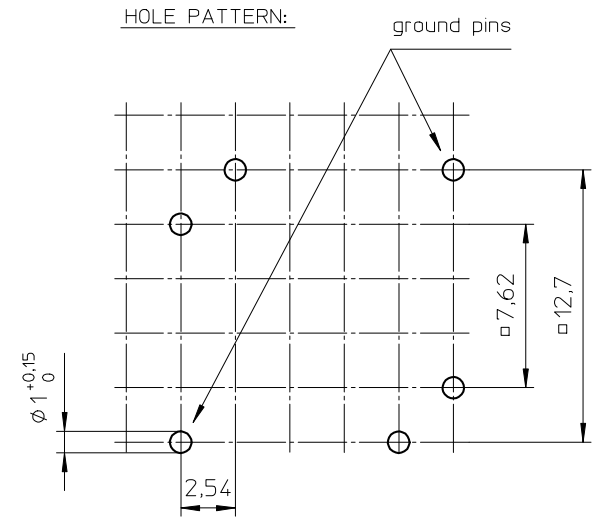

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.

Pin material: Copper-plated steel wire, Sn plated.


Max. operating temp.: acc. to IEC 60085 class H, 180°C.

Resistance to soldering heat: acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.

Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area: 14,5 mm².

Mean length of turn: 30 mm.



CLASSNO.		NAME		SUPER.		001		112		001		A3	
NAME		M.Marszalek		VER.		03-02-25		08-06-19		2017-01-18			
MPA		CHECK		CONTR.		DAT.		03-02-25		Property of		FERROXCUBE 2008	

CSV-RM6S-1S-4P-TZ

4322 021 06241

03-02-25
 08-06-19
 2017-01-18