

DATA SHEET

4B1 Material specification

Supersedes data of February 2002

2004 Sep 01

Material specification

4B1

4B1 SPECIFICATIONS

Medium permeability NiZn ferrite for use in wideband EMI-suppression (30 - 1000 MHz) as well as RF tuning, wideband and balun transformers.

| SYMBOL | CONDITIONS | VALUE | UNIT |
|--------------------|----------------------------------|---------------------------|------------------|
| μ_i | 25 °C; ≤ 10 kHz; 0.25 mT | $250 \pm 20\%$ | |
| B | 25 °C; 10 kHz; 3000 A/m | ≈ 360 | mT |
| | 100 °C; 10 kHz; 3000 A/m | ≈ 310 | |
| $\tan\delta/\mu_i$ | 25 °C; 1 MHz; 0.25 mT | $\leq 90 \times 10^{-6}$ | |
| | 25 °C; 3 MHz; 0.25 mT | $\leq 300 \times 10^{-6}$ | |
| ρ | DC; 25 °C | $\approx 10^5$ | Ωm |
| T_C | | ≥ 250 | °C |
| density | | ≈ 4600 | kg/m^3 |

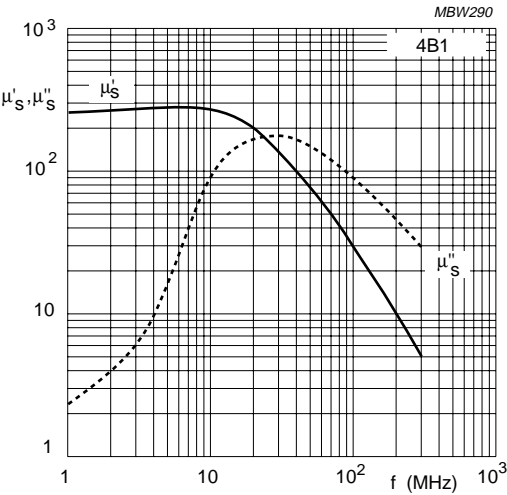


Fig.1 Complex permeability as a function of frequency.

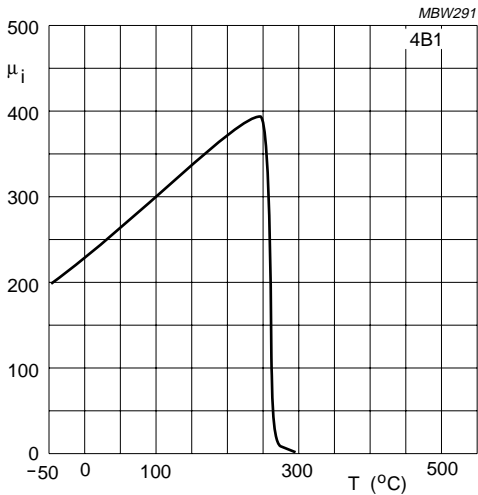


Fig.2 Initial permeability as a function of temperature.

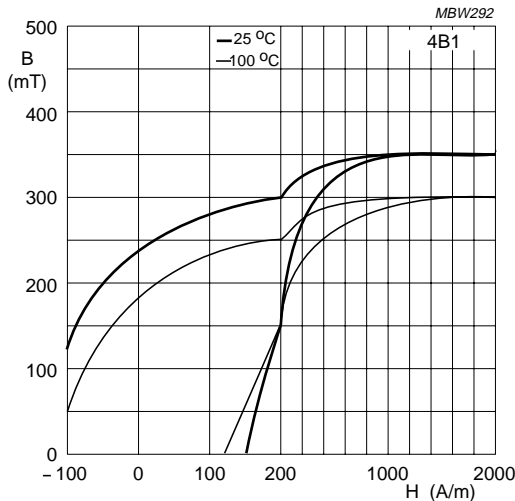


Fig.3 Typical B-H loops.

Material specification

4B1




DATA SHEET STATUS DEFINITIONS

| DATA SHEET STATUS | PRODUCT STATUS | DEFINITIONS |
|---------------------------|----------------|--|
| Preliminary specification | Development | This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |
| Product specification | Production | This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

| STATUS | INDICATION | DEFINITION |
|------------------|---|--|
| Prototype |  | These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change. |
| Design-in |  | These products are recommended for new designs. |
| Preferred | | These products are recommended for use in current designs and are available via our sales channels. |
| Support |  | These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability. |