
# Ferrite cores for RFID transponders



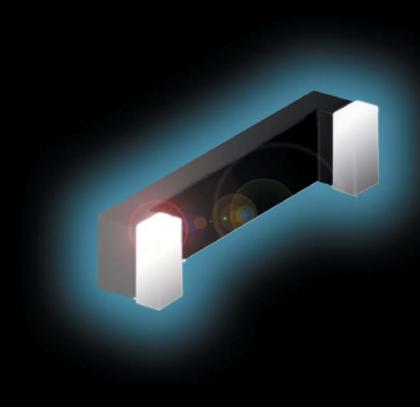

#### Introdution

Transponders are electronic devices capable of sending short RF messages upon request. These messages are commonly used to identify something where the transponder is attached, but can be used to send data as well. The term transponder comes from TRANSmitter/resPONDER.

There are many different types of transponders, depending on the final use of the transponder, and on the operating frequency. Low Frequency Magnetic Communication (below 500 kHz) commonly uses ferrite cores to increase the performance (and distance range) of the transponder.

Ferroxcube provides a wide range of ferrite cores fitting many of the existing market requirements, as well as years of experience in designing custom shapes for specific needs. New

materials have been developed improving temperature stability and reaching higher permeability values. In addition, advanced features like metallized contacts or tighter tolerances on mechanical and electrical parameters are feasible.

Newly developed materials include 4B2 and 4B4 improving the temperature stability and robustness of the complete system thanks to their high density structure. Also 3B7 has been optimized for the transponder shapes. Ferroxcube materials cover a wide range of needs, from temperature stability with  $\alpha F$  as low as I (from -40 to 85 °C) to high Q factor with tg  $\delta/\mu$  lower than  $100\times10^{-6}$  at 500 kHz. They are available in Nickel Zinc (4B1, 4B2, 4B4) high resistivity and Manganese Zinc (3C90, 3B7).

#### **Special features**

#### PVD metallized terminals on request.

Best adhesion ferrite-metallization-PCB. High accuracy layer thickness and size of the footprint.

Low height metallization provides optimum Q factor.

#### Tightest length tolerance.

Absolute tolerance down to ± 0.1 mm. Minimizes the spread in electrical properties.

#### **Advanced features**

Diameter tolerance down to  $\pm 0.015$  mm on ground rods.

Length tolerance down to  $\pm 0.2$  mm on rods.


Inductance sorting out in groups of ± 1%. Minimum rod diameter down to 0.3 mm. Parylene-C coating on rods and other shapes. Metallized terminals in Silver Palladium for SMD products.


Custom shapes available on request.


NiZn materials for high freq uncoated cores


		4B1	4B2*	4B4*
μ	25 °C; ≤10 kHz; 1mT	250 ± 20%	250 ± 20%	450 ± 20%
(K-1)	-40 to 85 °C; ≤10 kHz; 1mT	≈25 x 10 <sup>-6</sup>	≈1 x 10 <sup>-6</sup>	≈0 x 10 <sup>-6</sup>
tg δ/μ	25 °C; 3 MHz; 1mT	<300 x 10 <sup>-6</sup>	<300 x 10 <sup>-6</sup>	<1000 x 10 <sup>-6</sup>
T <sub>c</sub> (°C)		>250	>335	>115


<sup>\*</sup> New!!

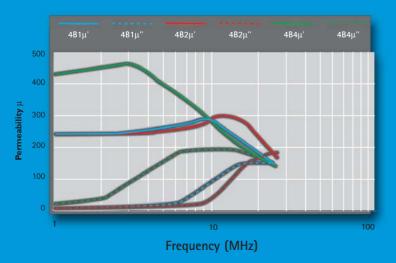

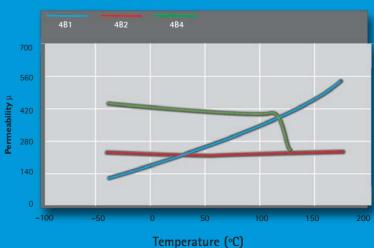

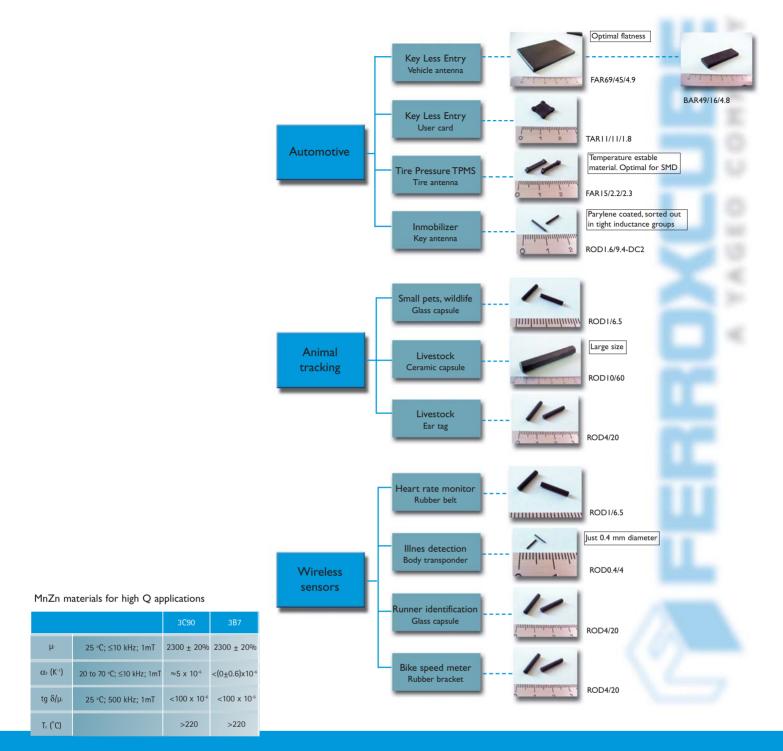

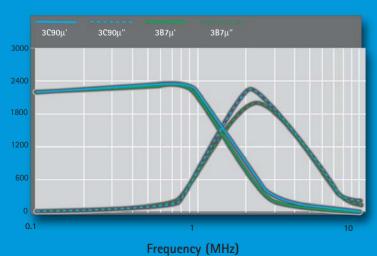

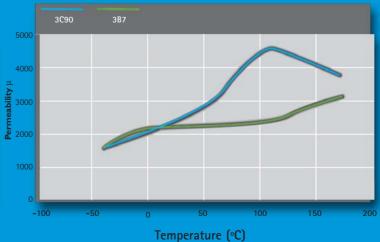

### www.ferroxcube.com

## FERROXCUBE - your global partner

**Australia**: Contact Ferroxcube Taiwan Tel. +886 2 86650099, Fax: +886 2 86650145

**Austria**: Contact Ferroxcube Germany Tel: +49 (040) 527 28 305, Fax: +49 (040) 527 28 306

**Benelux**: Ferroxcube Netherlands, EINDHOVEN
Tel: +31 (0)40 27 24 216, Fax: +31 (0)40 27 24 411

Canada: Contact Ferroxcube USA Tel: +1 915 599 2513/2328, Fax: +1 915 599 2555

China: Ferroxcube Hong Kong, SHANGHAI Tel. +86 21 6380 0607 / 3121, Fax. +86 21 6380 0910

**Czech Republic**: Contact Ferroxcube Poland Tel: +48 46 834 00 07, Fax: +48 46 834 00 35

**Denmark**: Contact Ferroxcube Sweden Tel: +46 8 580 119 76, Fax: +46 8 580 121 60

Finland: Contact Ferroxcube Sweden
Tel: +46 8 580 119 76. Fax: +46 8 580 121 60

France: Ferroxcube France, NANTERRE
Tel: +33 (01) 5551 8422, Fax: +33 (01) 5551 8423

Germany: Ferroxcube Germany, HAMBURG Tel: +49 (040) 527 28 302, Fax: +49 (040) 527 28 306

**Greece**: Contact Ferroxcube Italy
Tel: +39 02 241131 1 , Fax: +39 02 241131 11

Hungary: Contact Ferroxcube Poland Tel: +48 46 834 00 07, Fax: +48 46 834 00 35

Hong Kong: Ferroxcube Hong Kong, HONG KONG Tel: +852 2319 2740, Fax: +852 2319 2757

Indonesia: Contact Ferroxcube Singapore Tel: +65 6244 7815, Fax: +65 6449 0446

Ireland: Contact Ferroxcube UK
Tel: +44 870 2418759. Fax: +44 870 2418761

Israel: Arrow\Rapac Ltd., PETACH TIKVA Tel: +972 3 9203480, Fax: +972 3 9203443

Italy: Ferroxcube Italy, SESTO S. GIOVANNI (MI) Tel: +39 02 241131 1 , Fax: +39 02 241131 11

Malaysia: Contact Ferroxcube Singapore Tel: +65 6244 7815, Fax: +65 6449 0446

**Mexico**: Contact Ferroxcube USA Tel: +1 915 599 2513/2328. Fax: +1 915 599 2555

**New Zealand**: Contact Ferroxcube Taiwan Tel. +886 2 86650099, Fax: +886 2 86650145

Norway: Contact Ferroxcube Sweden Tel: +46 8 580 119 76, Fax: +46 8 580 121 60 Philippines: Contact Ferroxcube Singapore Tel: +65 6244 7815, Fax: +65 6449 0446

**Poland**: Ferroxcube Polska, SKIERNIEWICE Tel: +48 46 834 00 07, Fax: +48 46 834 00 35

Portugal: Contact Hispano Ferritas, Spain Tel: +34 949 247153, Fax: +34 949 247 146

Singapore: Ferroxcube Singapore, SINGAPORE Tel: +65 6244 7815, Fax: +65 6449 0446

**Spain:** Hispano Ferritas, GUADALAJARA Tel: +34 949 247 153, Fax: +34 949 247 146

**Sweden:** Ferroxcube Sweden, JÄRFÄLLA Tel: +46 8 580 119 76, Fax: +46 8 580 121 60

Switzerland: Contact Ferroxcube Germany
Tel: +49 (040) 527 28 305, Fax: +49 (040) 527 28 306

**Taiwan**: Ferroxcube Taiwan, **TAIPEI**Tel. +886 2 86650099, Fax: +886 2 86650145

Turkey: Contact Ferroxcube Italy
Tel: +39 02 241131 1 , Fax: +39 02 241131 11

**United Kingdom:** Ferroxcube UK, LEATHERHEAD Tel: +44 870 2418759, Fax: +44 870 2418761

United States: Ferroxcube USA, EL PASO (TX)
Tel: +1 915 599 2513/2328, Fax: +1 915 599 2555

For all other countries apply to closest regional sales office:

· HAMBURG, Germany

Tel: +49 (040) 527 28 302, Fax: +49 (040) 527 28 306

e-mail: saleseurope@ferroxcube.com

• EL PASO (TX), USA

Tel: +1 915 599 2513/2328, Fax: +1 915 599 2555

e-mail: salesusa@ferroxcube.com

TAIPEI, Taiwan

Tel. +886 2 86650099, Fax: +886 2 86650145 e-mail: salesasia@ferroxcube.com

© Ferroxcube International Holding B.V. 2004

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Visit our web-site for the latest information on new products, application info as well as updated phone- and fax numbers

Internet: www.ferroxcube.com

Printed in Spain

