

DATA SHEET

P30/19

P cores and accessories

Supersedes data of February 2002

2004 Sep 01


P cores and accessories

P30/19

CORE SETS

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(I/A)$	core factor (C1)	0.330	mm ⁻¹
V_e	effective volume	6190	mm ³
l_e	effective length	45.2	mm
A_e	effective area	137	mm ²
A_{\min}	minimum area	116	mm ²
m	mass of set	≈ 34	g

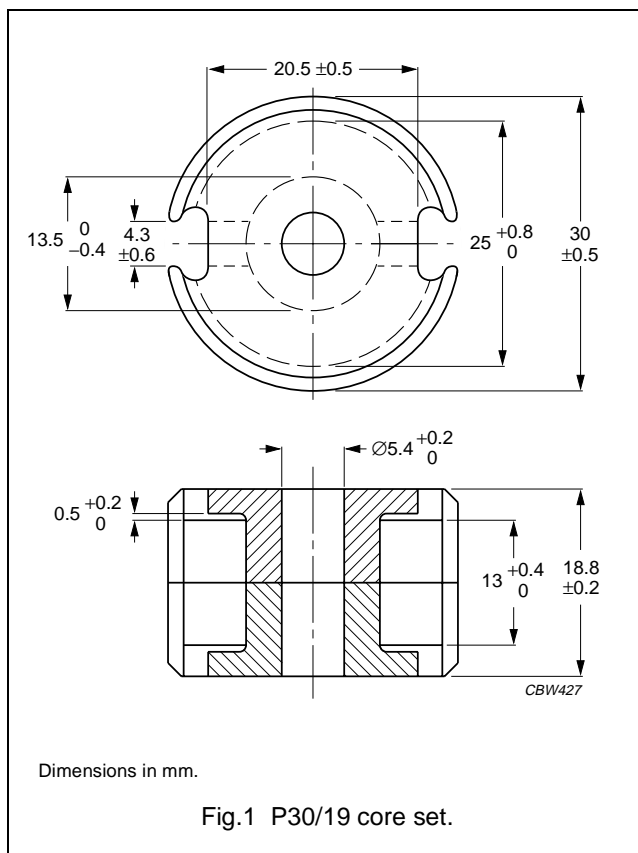

Core sets for general purpose transformers and power applications

Clamping force for A_L measurements, 250 ± 50 N.

GRADE	A_L (nH)	μ_e	AIR GAP (μm)	TYPE NUMBER	
3C81	250 $\pm 3\%$	≈ 66	≈ 840	P30/19-3C81-E250	
	315 $\pm 3\%$	≈ 83	≈ 640	P30/19-3C81-A315	
	400 $\pm 3\%$	≈ 105	≈ 480	P30/19-3C81-A400	
	630 $\pm 3\%$	≈ 165	≈ 290	P30/19-3C81-A630	
	1000 $\pm 3\%$	≈ 263	≈ 170	P30/19-3C81-A1000	
	8300 $\pm 25\%$	≈ 2180	≈ 0	P30/19-3C81	
3C91	des	8300 $\pm 25\%$	≈ 2180	≈ 0	P30/19-3C91
3F3	250 $\pm 3\%$	≈ 66	≈ 840	P30/19-3F3-E250	
	315 $\pm 3\%$	≈ 83	≈ 640	P30/19-3F3-A315	
	400 $\pm 3\%$	≈ 105	≈ 480	P30/19-3F3-A400	
	630 $\pm 3\%$	≈ 165	≈ 290	P30/19-3F3-A630	
	1000 $\pm 3\%$	≈ 263	≈ 170	P30/19-3F3-A1000	
	5750 $\pm 25\%$	≈ 1510	≈ 0	P30/19-3F3	

P cores and accessories

P30/19

Core sets of high permeability gradesClamping force for A_L measurements, 250 ± 50 N.

GRADE	A_L (nH)	μ_e	AIR GAP (μm)	TYPE NUMBER
3E27	$15100 \pm 25\%$	≈ 3960	≈ 0	P30/19-3E27

Properties of core sets under power conditions


GRADE	B (mT) at	CORE LOSS (W) at			
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; $\hat{B} = 200$ mT; T = 100 °C	f = 100 kHz; $\hat{B} = 100$ mT; T = 100 °C	f = 100 kHz; $\hat{B} = 200$ mT; T = 100 °C	f = 400 kHz; $\hat{B} = 50$ mT; T = 100 °C
3C81	≥ 320	≤ 1.43	–	–	–
3C91	≥ 315	–	$\leq 0.37^{(1)}$	$\leq 2.6^{(1)}$	–
3F3	≥ 315	–	≤ 0.7	–	≤ 1.2

Note

1. Measured at 60 °C.

COIL FORMERS**General data CP-P30/19 coil former**

PARAMETER	SPECIFICATION
Coil former material	polybutyleneterephthalate (PBT), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E45329 (R)
Maximum operating temperature	155 °C, "IEC 60085", class F

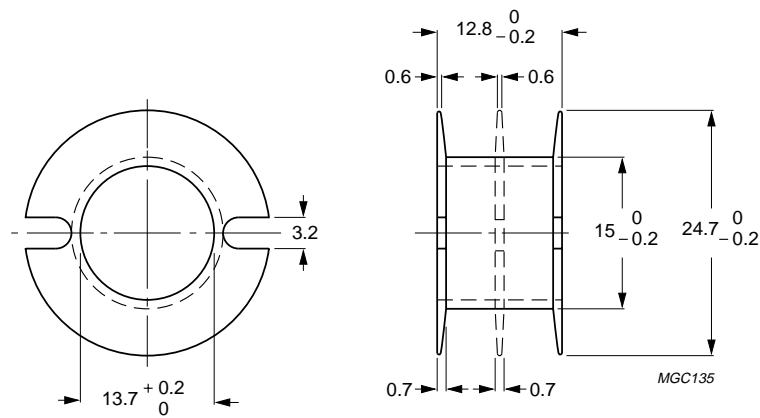

Dimensions in mm.


Fig.2 Coil former: CP-P30/19.

Winding data for P30/19 coil former

NUMBER OF SECTIONS	MINIMUM WINDING AREA (mm ²)	NOMINAL WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	TYPE NUMBER
1	53.2	11.1	62	CP-P30/19-1S
2	2 × 24.9	2 × 5.15	62	CP-P30/19-2S
3	3 × 15.5	3 × 3.2	62	CP-P30/19-3S

General data 6-pins P30/19 coil former for PCB mounting

PARAMETER	SPECIFICATION
Coil former material	polyamide (PA6.6), glass reinforced, flame retardant in accordance with "UL 94-HB"; UL file number E41938(M)
Maximum operating temperature	130 °C, "IEC 60085", class B
Pin material	copper-zinc alloy (CuZn), tin-lead alloy (SnPb) plated, transition to lead-free (Sn) ongoing
Resistance to soldering heat	"IEC 60068-2-20", Part 1, Test Tb, method 1B, 350 °C, 3.5 s. For connection of wire to pins: 430 °C, 2 seconds
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 °C, 2 s

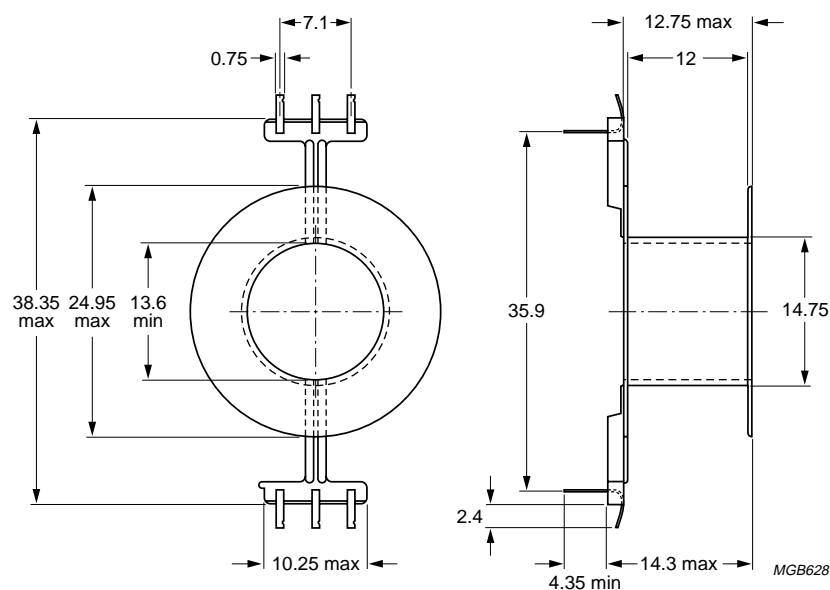

Dimensions in mm.

Fig.3 P30/19 coil former for PCB mounting; 6-pins.


Data for 6-pins P30/19 coil former for PCB mounting


NUMBER OF SECTIONS	MINIMUM WINDING AREA (mm ²)	NOMINAL WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	MINIMUM LENGTH OF PINS (mm)	TYPE NUMBER
1	55.2	12.8	62.2	4.4	CPV-P30/19-1S-6PD
1	55.2	12.8	62.2	6.8	CPV-P30/19-1S-6PDL

MOUNTING PARTS

General data and ordering information


ITEM	REMARKS	FIGURE	TYPE NUMBER
Tag plate	material: phenolformaldehyde (PF), glass reinforced	4	TGP-P30/19-9P
	flame retardant: in accordance with “UL 94V-0”; UL file number E167521(M)		
	maximum operating temperature: 180 °C, “IEC 60085”, class H		
	pins: copper-tin alloy (CuSn), tin-lead alloy (SnPb) plated		
	resistance to soldering heat in accordance with “IEC 60068-2-20”, Part 2, Test Tb, method 1B: 350 °C, 3.5 s		
	solderability in accordance with “IEC 60068-2-20”, Part 2, Test Ta, method 1: 235 °C, 2 s		
Container	copper-zinc alloy (CuZn), SnPb-plated, transition to lead-free (Sn) ongoing	5	CON-P30/19
	earth pins: presoldered		
Spring	CrNi-steel	6	SPR-P30/19
	spring force: ≈250 N when mounted		
Nut	copper-zinc alloy, nickel-plated	7	NUT
Bush	copper-zinc alloy, nickel-plated	8	FIB
Clamp	spring steel, tin-plated	9	CLM/TS-P30/19

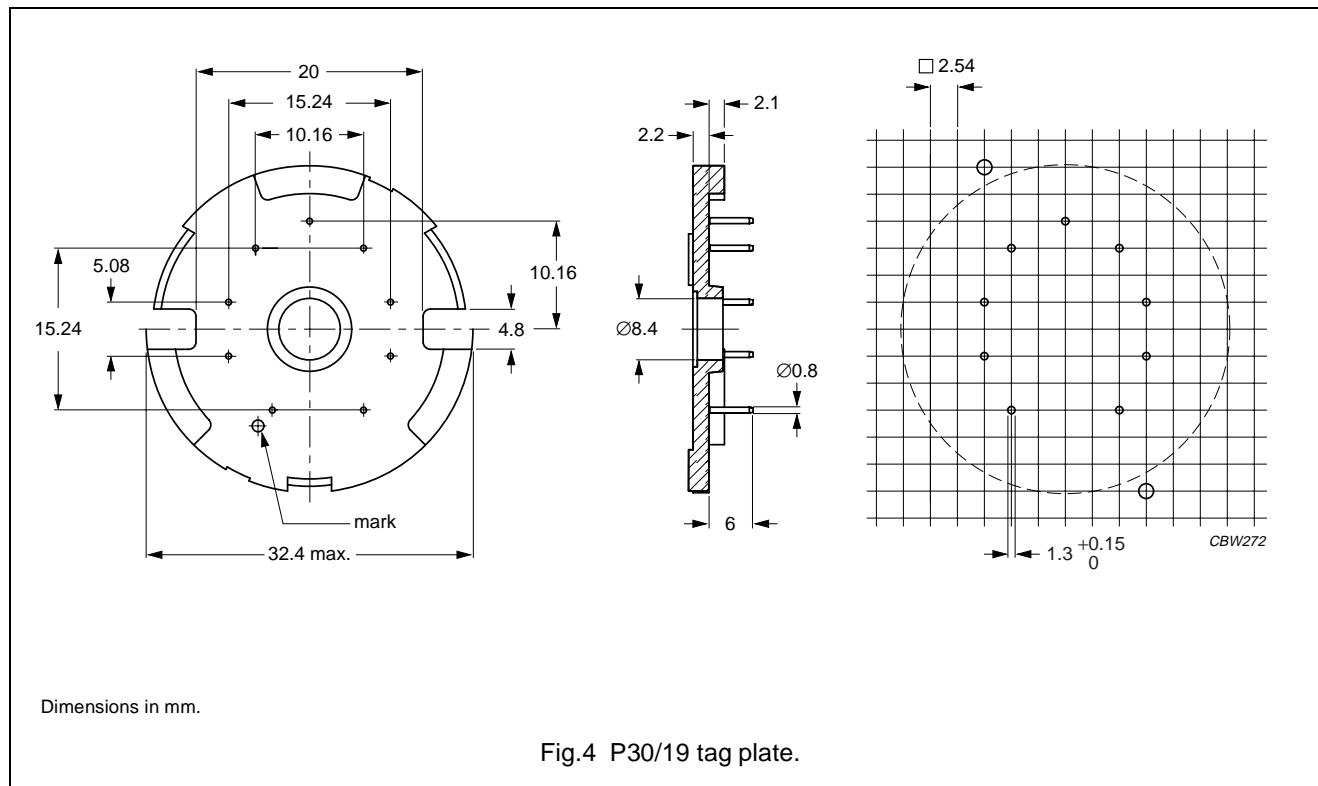

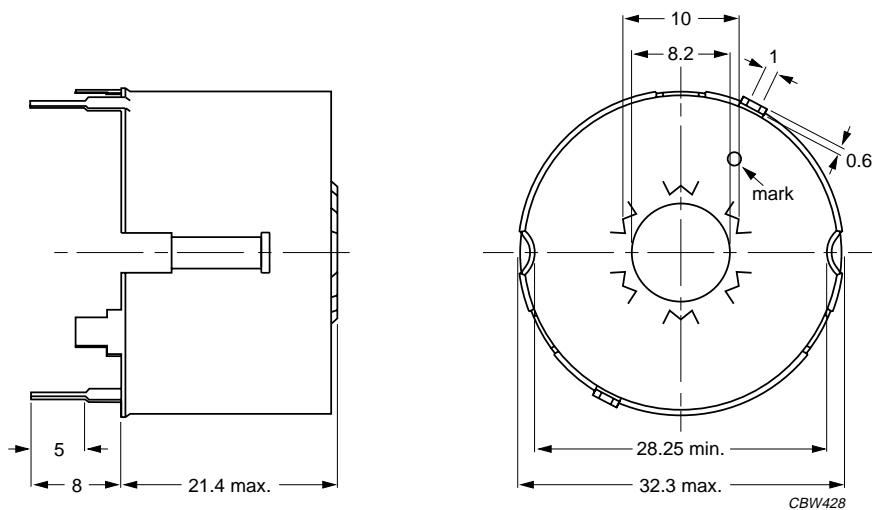

Dimensions in mm.

Fig.5 P30/19 container.

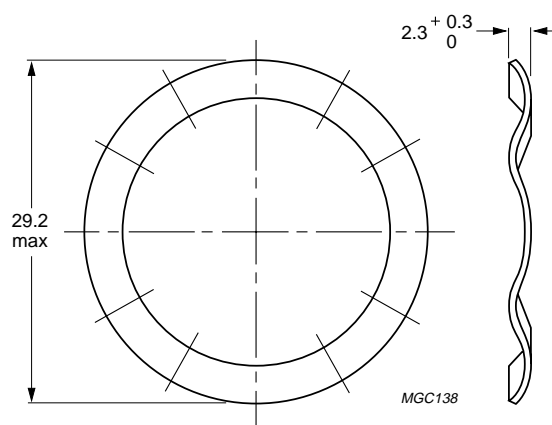


Dimensions in mm.

Fig.6 P30/19 spring.


P cores and accessories

P30/19

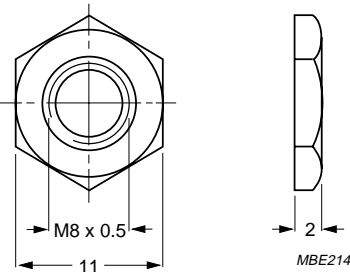


Dimensions in mm.

Fig.7 Fixing nut.

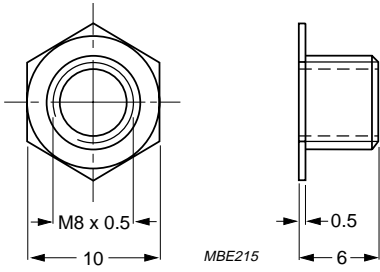

Dimensions in mm.

Fig.8 Fixing bush.

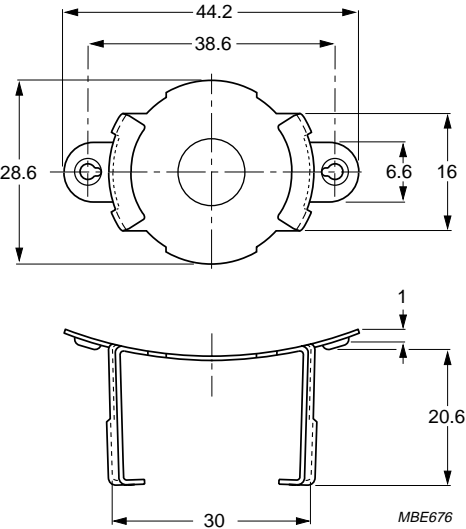

Dimensions in mm.

Fig.9 Clamp CLM/TS-P30/19.

P cores and accessories

P30/19




DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
Prototype		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in		These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support		These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.