

# DATA SHEET

**RM4/I**

RM cores and accessories

Supersedes data of February 2002

2004 Sep 01


## RM cores and accessories

## RM4/I

## CORE SETS

## Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(l/A)$	core factor (C1)	1.69	$\text{mm}^{-1}$
$V_e$	effective volume	322	$\text{mm}^3$
$l_e$	effective length	23.3	mm
$A_e$	effective area	13.8	$\text{mm}^2$
$A_{\min}$	minimum area	11.5	$\text{mm}^2$
m	mass of set	$\approx 1.7$	g

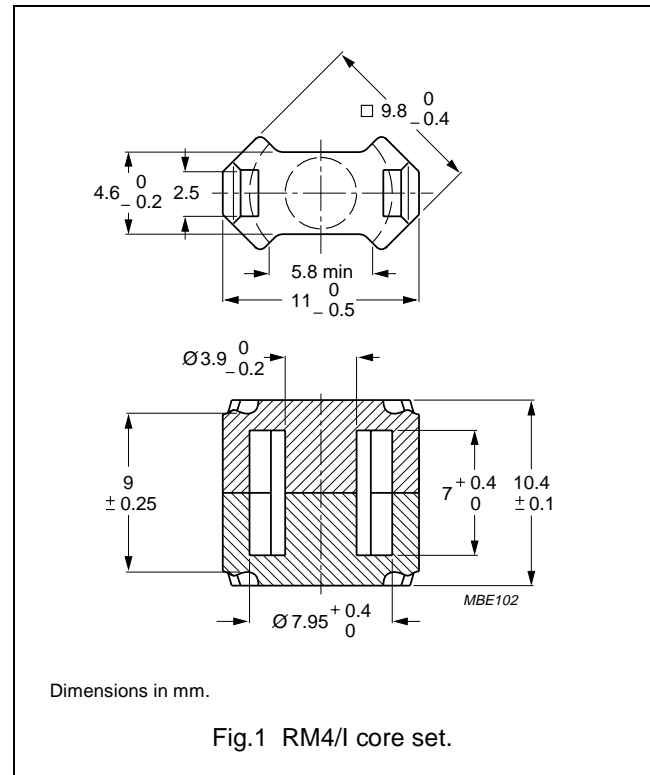

## Core sets for general purpose transformers and power applications

Clamping force for  $A_L$  measurements,  $10 \pm 5$  N.

GRADE	$A_L$ (nH)	$\mu_e$	AIR GAP ( $\mu\text{m}$ )	TYPE NUMBER
3C90	$1125 \pm 25\%$	$\approx 1510$	$\approx 0$	RM4/I-3C90
3C94	$1125 \pm 25\%$	$\approx 1510$	$\approx 0$	RM4/I-3C94
3C96 <b>des</b>	$1000 \pm 25\%$	$\approx 1340$	$\approx 0$	RM4/I-3C96
3F3	$100 \pm 3\%$	$\approx 134$	$\approx 200$	RM4/I-3F3-A100
	$160 \pm 3\%$	$\approx 215$	$\approx 110$	RM4/I-3F3-A160
	$250 \pm 10\%$	$\approx 336$	$\approx 60$	RM4/I-3F3-A250
	$950 \pm 25\%$	$\approx 1280$	$\approx 0$	RM4/I-3F3
3F35 <b>prot</b>	$800 \pm 25\%$	$\approx 1080$	$\approx 0$	RM4/I-3F35
3F4 <b>des</b>	$100 \pm 3\%$	$\approx 134$	$\approx 180$	RM4/I-3F4-A100
	$160 \pm 3\%$	$\approx 215$	$\approx 95$	RM4/I-3F4-A160
	$250 \pm 10\%$	$\approx 336$	$\approx 45$	RM4/I-3F4-A250
	$560 \pm 25\%$	$\approx 750$	$\approx 0$	RM4/I-3F4
3F45 <b>prot</b>	$560 \pm 25\%$	$\approx 750$	$\approx 0$	RM4/I-3F45

## RM cores and accessories

## RM4/I

## Core sets for filter applications

Clamping force for  $A_L$  measurements,  $10 \pm 5$  N.

GRADE	$A_L$ (nH)	$\mu_e$	AIR GAP ( $\mu\text{m}$ )	TYPE NUMBER
3B46 <small>des</small>	$1550 \pm 25 \%$	$\approx 2085$	$\approx 0$	RM4/I-3B46

## Core sets of high permeability grades

Clamping force for  $A_L$  measurements,  $10 \pm 5$  N.

GRADE	$A_L$ (nH)	$\mu_e$	AIR GAP ( $\mu\text{m}$ )	TYPE NUMBER
3E5	$3500 +40/-30\%$	$\approx 4700$	$\approx 0$	RM4/I-3E5

## Properties of core sets under power conditions

GRADE	B (mT) at	CORE LOSS (W) at			
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; $\hat{B} = 200$ mT; T = 100 °C	f = 100 kHz; $\hat{B} = 100$ mT; T = 100 °C	f = 100 kHz; $\hat{B} = 200$ mT; T = 100 °C	f = 400 kHz; $\hat{B} = 50$ mT; T = 100 °C
3C90	$\geq 320$	$\leq 0.04$	$\leq 0.04$	–	–
3C94	$\geq 320$	–	$\leq 0.03$	$\leq 0.2$	–
3C96	$\geq 340$	–	$\leq 0.025$	$\leq 0.15$	$\leq 0.07$
3F3	$\geq 300$	–	$\leq 0.05$	–	$\leq 0.07$
3F35	$\geq 300$	–	–	–	$\leq 0.04$
3F4	$\geq 250$	–	–	–	–

## Properties of core sets under power conditions (continued)

GRADE	B (mT) at	CORE LOSS (W) at				
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 500 kHz; $\hat{B} = 50$ mT; T = 100 °C	f = 500 kHz; $\hat{B} = 100$ mT; T = 100 °C	f = 1 MHz; $\hat{B} = 30$ mT; T = 100 °C	f = 1 MHz; $\hat{B} = 50$ mT; T = 100 °C	f = 3 MHz; $\hat{B} = 10$ mT; T = 100 °C
3C90	$\geq 320$	–	–	–	–	–
3C94	$\geq 320$	–	–	–	–	–
3C96	$\geq 340$	$\leq 0.15$	–	–	–	–
3F3	$\geq 300$	–	–	–	–	–
3F35	$\geq 300$	$\leq 0.05$	$\leq 0.4$	–	–	–
3F4	$\geq 250$	–	–	$\leq 0.08$	–	$\leq 0.14$
3F45	$\geq 250$	–	–	$\leq 0.064$	$\leq 0.16$	$\leq 0.11$

## RM cores and accessories


## RM4/I

**COIL FORMERS**


For the information on coil formers suitable for RM4/I, see data sheet "RM4"

**MOUNTING PARTS****General data mounting clip with earth pin**

ITEM	SPECIFICATION
Clamping force	$\approx 5$ N
Clip material	stainless steel (CrNi)
Clip plating	tin-lead alloy (SnPb), transition to lead-free (Sn) ongoing
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1
Type number	CLI/P-RM4/5/I

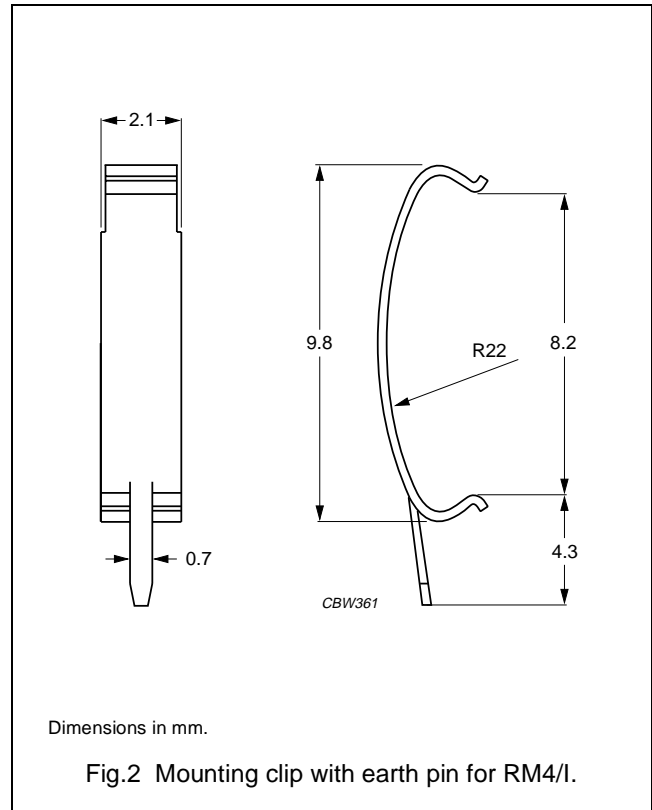**General data mounting clip without earth pin**

ITEM	SPECIFICATION
Clamping force	$\approx 5$ N
Clip material	stainless steel (CrNi)
Type number	CLI-RM4/5/I

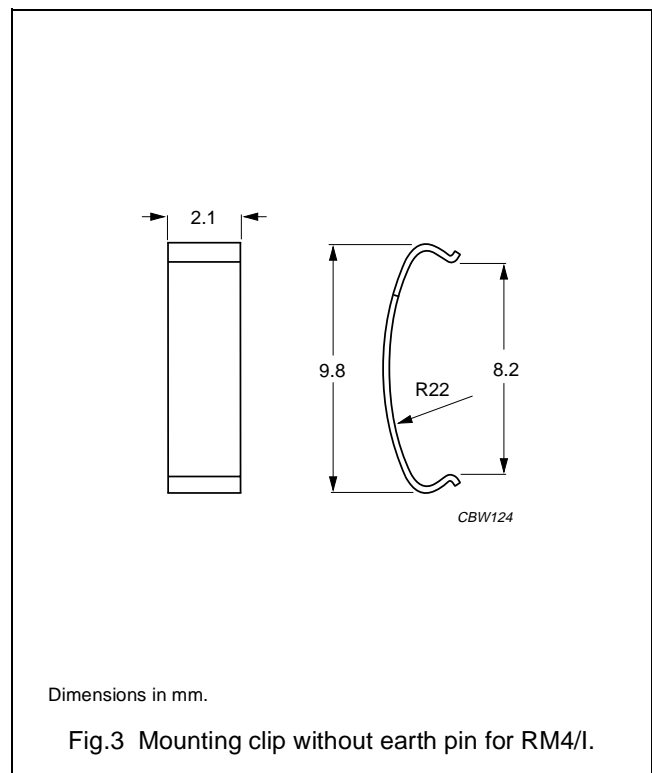

## RM cores and accessories

RM4/I




## DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

## DISCLAIMER

**Life support applications** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

## PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
<b>Prototype</b>		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
<b>Design-in</b>		These products are recommended for new designs.
<b>Preferred</b>		These products are recommended for use in current designs and are available via our sales channels.
<b>Support</b>		These products are <b>not</b> recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.